



SPREADER PRODUCT GUIDE: 2024-25
BEST SERVED COLD

SPREADERS

WORK AHEAD OF EVERY STORM. STAY ON TOP OF EVERY JOB.
GET MORE DONE EVERY DAY.

IS YOUR FLEET STORM READY?

There is no feeling like an incoming storm. The air dampens. The clouds close. The sky darkens. And the focus becomes clear. Because for you—snow and ice pros—this isn't just some storm. It's go time.

Since 1948, Fisher Engineering has built products that capitalize on that feeling. And this winter, we're proud to present our full line of ice control equipment for operators of every kind. Now let's get your fleet ready for the storm—starting with products that take on the ice.



HOPPERS

Commercial operators servicing multiple large, complex properties with de-icing services utilizing bulk materials.



TAILGATES

Commercial operators and private users servicing smaller properties or areas of focus with bagged de-icing materials.



SPEED-CASTER 900

WARNING
Read manual, set to correct spreading rate (see setting table). Excessive spread rates may seriously damage surfaces.

WARNING
Do not touch moving parts. Keep hands and feet clear of rotating parts. Do not touch the spreader while it is running.

WARNING
Do not touch moving parts. Keep hands and feet clear of rotating parts. Do not touch the spreader while it is running.

WARNING
Do not touch moving parts. Keep hands and feet clear of rotating parts. Do not touch the spreader while it is running.

TAILGATE SPREADERS



SIGNATURE FEATURES



CONSERVE SPACE

Mounting the spreader on your truck's tailgate keeps the truck bed free for extra de-icing material or equipment.



MOUNTING CHOICES

A variety of mounting options allow you to select the model that best fits your vehicle and usage.



POLYETHYLENE CONSTRUCTION

High-quality polyethylene construction withstands the cold and corrosive conditions of icy operations—especially in wet and coastal conditions.



WIDESPREAD PERFORMANCE

Spread widths from 20' to 40' allow each pass to handle a wide area for maximum de-icing performance.

TAILGATE SPREADERS

RIGHT-SIZED FOR BAGGED DE-ICER APPLICATION

BEST SUITED FOR:
Commercial and residential operators with pickup trucks that need to treat small areas or provide touch up services.

WHAT THIS MEANS FOR YOU:
For small properties, touch-up jobs, and at-home use, tailgate spreaders are the answer. Easy to fill with a variety of bagged de-icers, tailgate spreaders attach easily and leave the truck bed free to haul additional material or equipment.

VEHICLE COMPATIBILITY:
Fits wide range of truck models;
(see specs on page 38.)

(See page 38 for full product specs)



QUICK-CASTER™ 300

TAILGATE BROADCAST SPREADER

With 3.0 cu ft of capacity, the QUICK-CASTER 300 tailgate spreader is a perfect choice for treating high traffic areas within a property or completing touch-up work. Optimized to work with bagged rock salt, the 300G works with a wide range of vehicles.

CAPACITY:	3.0 cu ft (0.09 cu m)
MATERIAL DELIVERY SYSTEM (cm):	Single-Stage, 2.5"x5.75" (6.35 x 14.61) steel vertical auger
SPREAD WIDTH:	25' (7.6 m)



QUICK-CASTER™ 300G

TAILGATE BROADCAST SPREADER WITH ELECTRIC FEEDGATE

The QUICK-CASTER 300G features an electric feedgate for the precise spreading of fine de-icing materials for high traffic areas and touch up work.

CAPACITY:	3.0 cu ft (0.09 cu m)
MATERIAL DELIVERY SYSTEM (cm):	Single-Stage, 2.5"x5.75" (6.35 x 14.61) steel vertical auger
SPREAD WIDTH:	20' (6.1 m)



QUICK-CASTER 300W

WIRELESS ELECTRIC TAILGATE SPREADER

This 3.0 cu ft tailgate spreader communicates wirelessly with the in-cab control for easy installation with no wires or harnesses. Simply mount to the vehicle's tailgate, pair to the control, and head off to spread material.

CAPACITY:	3.0 cu ft (0.09 cu m)
MATERIAL DELIVERY SYSTEM (cm):	Single-Stage, 2.5"x5.75" (6.35 x 14.61) steel vertical auger
SPREAD WIDTH:	25' (7.6 m)



LOW PROFILE 500

TAILGATE BROADCAST SPREADER

A compact, low-profile spreader designed for light-duty use, providing efficient salt and sand distribution for smaller truck setups and residential areas.



CAPACITY: 5.0 cu ft (0.14 cu m)

MATERIAL DELIVERY SYSTEM (cm): Single-Stage, 2.5"x5.75" (6.35 x 14.61) steel vertical auger

SPREAD WIDTH: 30' (9.14 m)



LOW PROFILE 1000

TAILGATE BROADCAST SPREADER

Get mid-range capacity for a tailgate spreader with a low-profile design for clear visibility to the rear of the vehicle.

CAPACITY: 8.0 cu ft (0.23 cu m)

MATERIAL DELIVERY SYSTEM (cm): Single-Stage, 2.5"x5.75" (6.35 x 14.61) steel vertical auger

SPREAD WIDTH: 30' (9.14 m)



LOW PROFILE 2500

TAILGATE BROADCAST SPREADER

A low-profile design and the highest capacity in the range make the LOW PROFILE 2500 tailgate spreader the choice for those servicing high traffic areas for mid- to large sized properties.

CAPACITY: 8.5 cu ft (0.24 cu m)

MATERIAL DELIVERY SYSTEM (cm): Single-Stage, 2.5"x5.75" (6.35 x 14.61) steel vertical auger

SPREAD WIDTH: 30' (9.14 m)



SPEED-CASTER™ 525

POLY TAILGATE HOPPER

A high-performance spreader designed for light to medium-duty use, delivering precise material distribution with a compact design for efficient snow and ice control.

CAPACITY:	5.25 cu ft (0.15 cu m)
MATERIAL DELIVERY SYSTEM (cm):	Dual-Stage, 3" x 14" (762 x 35.56) steel vertical auger
SPREAD WIDTH:	30' (9.14 m)



SPEED-CASTER™ 900

POLY TAILGATE HOPPER

All of the performance and efficiency of the Speed-Caster 525, with over 40% more capacity. Ideal for those who prefer a tailgate spreader but have plenty of work to do.

CAPACITY:	9.00 cu ft (0.25 cu m)
MATERIAL DELIVERY SYSTEM (cm):	Dual-Stage, 3" x 14" (762 x 35.56) steel vertical auger
SPREAD WIDTH:	40' (12.19 m)



MOUNTING & MATERIAL GUIDE

(Assumes dry, free-flowing materials)

* May require use of auger tube restriction kit accessory.

↑ May require 5-flight auger accessory.

⇐ Receiver mount & adapter required. Sold separately.

MOUNTS GUIDE (TAILGATES ONLY)

QUICK-CASTER™	QUICK-CASTER 300	QUICK-CASTER 300G	QUICK-CASTER 300W
RECEIVER HITCH MOUNT:	STD	STD	STD
FIXED MOUNT:			
DUAL-SWING MOUNT:			
UTILITY MOUNT:	■	■	■
DROP UTILITY MOUNT:	■	■	■
3-POINT MOUNT:	■	■	■
PIVOT MOUNT:			

LOW PROFILE	LOW PROFILE 500	LOW PROFILE 1000	LOW PROFILE 2500
RECEIVER HITCH MOUNT:	STD	■	STD
FIXED MOUNT:		■	
DUAL-SWING MOUNT:		■	
UTILITY MOUNT:			
DROP UTILITY MOUNT:			
3-POINT MOUNT:			
PIVOT MOUNT:			

SPEED-CASTER™	SPEED-CASTER 525	SPEED-CASTER 900
RECEIVER HITCH MOUNT:	STD	■ *
FIXED MOUNT:		
DUAL-SWING MOUNT:		
UTILITY MOUNT:		
DROP UTILITY MOUNT:		
3-POINT MOUNT:	STD	■
PIVOT MOUNT:		■

TAILGATE SPREADER ACCESSORIES

SAFETY ACCESSORIES	QUICK-CASTER 300	QUICK-CASTER 300G	QUICK-CASTER 300W
WORK LIGHT KIT (SINGLE) FLEET FLEX			
SECONDARY WORK LIGHT KIT (SINGLE) FLEET FLEX			

MATERIAL FLOW & PERFORMANCE	QUICK-CASTER 300	QUICK-CASTER 300G	QUICK-CASTER 300W
TOP SCREEN BAG SPLITTER KIT			
ADJUSTABLE DEFLECTOR KIT			
SCREEN KIT			
MATERIAL CONTROL TUBE			
WEATHER COVER	STD	STD	STD
5-FLIGHT AUGER			

OPERATOR CUSTOMIZATION	QUICK-CASTER 300	QUICK-CASTER 300G	QUICK-CASTER 300W
TRUCK PROTECTOR FLAP			
7-PIN WIRELESS VEHICLE HARNESS			■
SPREADER CONTROL ADAPTER FOR CUP HOLDER MOUNT			

MATERIALS GUIDE - GRANULAR (ALL PRODUCTS)

ALL PRODUCTS	TEMPEST™ POLY	TEMPEST STAINLESS	QUICK-CASTER™ 300G	QUICK-CASTER 300 & 300W	LOW PROFILE 500
BAGGED ICE MELTERS:					■
BAGGED ROCK SALT:			■	■	■
BULK SALT:	■	■	■		
CALCIUM FLAKES:			■		■ ↑
CALCIUM CHLORIDE PELLETS:			■		■ ↑
SALT/SAND MIX:	■	■			
SAND:	■	■			

	LOW PROFILE 1000	LOW PROFILE 2500	SPEED-CASTER™ 525	SPEED-CASTER 900	WALK-BEHIND WB-100B & WB-160D
BAGGED ICE MELTERS:	■	■	■ *	■ *	■
BAGGED ROCK SALT:	■	■	■	■	■
BULK SALT:			■	■	■
CALCIUM FLAKES:	■ ↑	■ ↑	■ *	■ *	■
CALCIUM CHLORIDE PELLETS:	■ ↑	■ ↑	■ *	■ *	■
SALT/SAND MIX:					
SAND:					

MATERIALS GUIDE - LIQUID (ALL PRODUCTS)

ALL PRODUCTS	WALK-BEHIND SS-120 Sprayer	PRE-WET SYSTEMS Trilogy Defense
BRINE	■	■
CALCIUM CHLORIDE SOLUTION	■	■
PREMIUM SOLUTIONS	■	■

	LOW PROFILE 500	LOW PROFILE 1000	LOW PROFILE 2500	SPEED-CASTER 525	SPEED-CASTER 900
	■	■	■	■	■
	■	■	■		
	■		■		
		■			
		■			
				■	■
	■	■	■		

	LOW PROFILE 500	LOW PROFILE 1000	LOW PROFILE 2500	SPEED-CASTER 525	SPEED-CASTER 900
		■			
				■	■



THREE LINES. THREE PURPOSES. ENDLESS ABILITIES.

QUICK-CASTER™

Single-stage delivery, compact and lightweight, designed for easy mounting on smaller vehicles, ideal for residential properties or light commercial use.

LOW PROFILE

Single-stage delivery, low profile design for better visibility and stability, perfect for mid-sized trucks and commercial applications.

SPEED-CASTER™

Dual-stage delivery, robust performance with dual motors for enhanced material flow control, suited for medium to heavy-duty commercial use.

TARGET YOUR TAILGATE

QUICK-CASTER™ 300

POLY TAILGATE SPREADER

HOPPER CONSTRUCTION:	Polyethylene	APPROXIMATE WEIGHT (EMPTY):	68 lb
VEHICLE COMPATIBILITY:	1-Ton or Smaller Pickup Trucks	OVERALL DIMENSIONS (LxWxH):	22" x 30" x 30"
MATERIAL COMPATIBILITY:	Bagged Rock Salt	MOTOR:	12-volt DC motor mounted in weather-resistant enclosure
CAPACITY (VOLUME):	3.0 cu ft	AUGER (DIAMETER X LENGTH):	3' Vertical High-Flow Auger
SPREAD WIDTH:	Up to 25'	SPINNER SIZE:	10" Nylon/Glass Reinforced Resin
		AVAILABLE MOUNTS:	2" Light-Duty Hitch Mount (std)

QUICK-CASTER 300G

POLY TAILGATE SPREADER WITH ELECTRIC FEEDGATE

HOPPER CONSTRUCTION:	Polyethylene	APPROXIMATE WEIGHT (EMPTY):	75 lb
VEHICLE COMPATIBILITY:	1-Ton or Smaller Pickup Trucks	OVERALL DIMENSIONS (LxWxH):	22" x 30" x 30"
MATERIAL COMPATIBILITY:	Bagged Ice Melters, Calcium Flakes, Calcium Chloride Pellets, Bagged Rock Salt	MOTOR:	12-volt DC motor mounted in weather-resistant enclosure
CAPACITY (VOLUME):	3.0 cu ft	AUGER (DIAMETER X LENGTH):	-
SPREAD WIDTH:	Up to 20'	SPINNER SIZE:	10" Nylon/Glass Reinforced Resin
		AVAILABLE MOUNTS:	2" Light-Duty Hitch Mount (std)

QUICK-CASTER 300W

POLY TAILGATE SPREADER WITH WIRELESS CONTROL

HOPPER CONSTRUCTION:	Polyethylene	OVERALL DIMENSIONS (LxWxH):	22" x 30" x 32"
VEHICLE COMPATIBILITY:	1-Ton or Smaller Pickup Trucks	MOTOR:	Electric, 12V, 1/3 hp
MATERIAL COMPATIBILITY:	Bagged Rock Salt	AUGER (DIAMETER X LENGTH):	2.5" x 5.75" Vertical High-Flow Auger
CAPACITY (VOLUME):	3.0 cu ft	SPINNER SIZE:	10" Nylon/Glass Reinforced Resin
SPREAD WIDTH:	Up to 25'	AVAILABLE MOUNTS:	2" Receiver (std)
APPROXIMATE WEIGHT (EMPTY):	68 lb	OPTIONAL MOUNTS:	Drop Utility, Trailer Utility, 3-Point Mounts

LOW PROFILE 500

POLY TAILGATE SPREADER

HOPPER CONSTRUCTION:	Polyethylene	APPROXIMATE WEIGHT (EMPTY):	75 lb with mount
VEHICLE COMPATIBILITY:	Vehicles with Class III Hitch	OVERALL DIMENSIONS (LxWxH):	21" x 39" x 34"
MATERIAL COMPATIBILITY:	Bagged Ice Melters, Bagged Rock Salt, Calcium Flakes*, & Calcium Chloride Pellets*	MOTOR:	Electric, 12V, 1/3 hp
CAPACITY (VOLUME):	5.00 cu ft	AUGER (DIAMETER X LENGTH):	2.63" x 6"
SPREAD WIDTH:	Up to 30'	SPINNER SIZE:	10" Nylon/Glass Reinforced Resin
		AVAILABLE MOUNTS:	Class III Receiver Hitch (std)

LOW PROFILE 1000

POLY TAILGATE SPREADER

HOPPER CONSTRUCTION:	Polyethylene	APPROXIMATE WEIGHT (EMPTY):	105 lb without mount
VEHICLE COMPATIBILITY:	Full Size Trucks (Over 6,000 lb GVWR)	OVERALL DIMENSIONS (LxWxH):	19.5" x 50.5" x 35"
MATERIAL COMPATIBILITY:	Bagged Ice Melters, Bagged Rock Salt, Calcium Flakes*, & Calcium Chloride Pellets*	MOTOR:	Electric, 12V, 1/3 hp
CAPACITY (VOLUME):	8.00 cu ft	AUGER (DIAMETER X LENGTH):	2.63" x 6"
SPREAD WIDTH:	Up to 30'	SPINNER SIZE:	10" Nylon/Glass Reinforced Resin
		OPTIONAL MOUNTS:	Fixed Mount, Class IV Hitch Mount, Dual-Swing

LOW PROFILE 2500

POLY TAILGATE SPREADER

HOPPER CONSTRUCTION:	Polyethylene	APPROXIMATE WEIGHT (EMPTY):	131 lb without mount
VEHICLE COMPATIBILITY:	Full Size Trucks (Over 6,000 lb GVWR)	OVERALL DIMENSIONS (LxWxH):	25" x 50" x 42"
MATERIAL COMPATIBILITY:	Bagged Ice Melters, Bagged Rock Salt, Calcium Flakes*, & Calcium Chloride Pellets*	MOTOR:	Electric, 12V, 1/3 hp
CAPACITY (VOLUME):	8.50 cu ft	AUGER (DIAMETER X LENGTH):	2.63" x 9"
SPREAD WIDTH:	Up to 30'	SPINNER SIZE:	15" Nylon/Glass Reinforced Resin
		OPTIONAL MOUNTS:	Class IV Receiver Hitch Mount (std)

SPEED-CASTER™ 525

POLY TAILGATE SPREADER

HOPPER CONSTRUCTION:	Polyethylene	OVERALL DIMENSIONS (LxWxH):	20.5" x 38" x 34"
VEHICLE COMPATIBILITY:	1-Ton or Smaller Pickup Trucks	MOTOR:	Dual Electric, 12V, 1/3 hp
MATERIAL COMPATIBILITY:	Bagged Rock Salt & Bulk Rock Salt	AUGER (DIAMETER X LENGTH):	3" x 14" Heavy-Duty Solid Steel
CAPACITY (VOLUME):	5.25 cu ft	SPINNER SIZE:	10" Nylon/Glass Reinforced Resin
SPREAD WIDTH:	Up to 30'	AVAILABLE MOUNTS:	2" Receiver (std)
APPROXIMATE WEIGHT (EMPTY):	160 lb	OPTIONAL MOUNTS:	Drop Utility, Trailer Utility, 3-Point Mounts

SPEED-CASTER 900

POLY TAILGATE SPREADER

HOPPER CONSTRUCTION:	Polyethylene	OVERALL DIMENSIONS (LxWxH):	24" x 52" x 36"
VEHICLE COMPATIBILITY:	1-Ton or Smaller Pickup Trucks	MOTOR:	Dual Electric, 12V, 1/3 hp
MATERIAL COMPATIBILITY:	Bagged Rock Salt & Bulk Rock Salt	AUGER (DIAMETER X LENGTH):	3" x 20" Heavy-Duty Solid Steel
CAPACITY (VOLUME):	9.00 cu ft	SPINNER SIZE:	12" Nylon/Glass Reinforced Resin
SPREAD WIDTH:	Up to 40'	OPTIONAL MOUNTS:	Pivot Mount, 2" Receiver Hitch
APPROXIMATE WEIGHT (EMPTY):	180 lb		(Requires Adapter Mount), 3-Point Hitch Mount

QUICK-CASTER™ 300

POLY TAILGATE SPREADER

HOPPER CONSTRUCTION:	Polyethylene	APPROXIMATE WEIGHT (EMPTY):	30.8 kg
VEHICLE COMPATIBILITY:	1-Ton or Smaller Pickup Trucks	OVERALL DIMENSIONS (LxWxH):	55.9 cm x 76.2 cm x 76.2 cm
MATERIAL COMPATIBILITY:	Bagged Rock Salt	MOTOR:	12-volt DC motor mounted in weather-resistant enclosure
CAPACITY (VOLUME):	0.09 cu m	AUGER (DIAMETER X LENGTH):	6.35 cm x 14.61 cm Vertical High-Flow Auger
SPREAD WIDTH:	7.6 m	SPINNER SIZE:	25.4 cm Nylon/Glass Reinforced Resin
		AVAILABLE MOUNTS:	2.54 cm Light-Duty Hitch Mount (std)

QUICK-CASTER 300G

POLY TAILGATE SPREADER WITH ELECTRIC FEEDGATE

HOPPER CONSTRUCTION:	Polyethylene	APPROXIMATE WEIGHT (EMPTY):	34.0 kg
VEHICLE COMPATIBILITY:	1-Ton or Smaller Pickup Trucks	OVERALL DIMENSIONS (LxWxH):	55.9 cm x 76.2 cm x 76.2 cm
MATERIAL COMPATIBILITY:	Bagged Ice Melters, Calcium Flakes, Calcium Chloride Pellets, Bagged Rock Salt	MOTOR:	12-volt DC motor mounted in weather-resistant enclosure
CAPACITY (VOLUME):	0.09 cu m	AUGER (DIAMETER X LENGTH):	-
SPREAD WIDTH:	6.1 m	SPINNER SIZE:	25.4 cm Nylon/Glass Reinforced Resin
		AVAILABLE MOUNTS:	2.54 cm Light-Duty Hitch Mount (std)

QUICK-CASTER 300W

POLY TAILGATE SPREADER WITH WIRELESS CONTROL

HOPPER CONSTRUCTION:	Polyethylene	OVERALL DIMENSIONS (LxWxH):	55.9 cm x 76.2 cm x 81.3 cm
VEHICLE COMPATIBILITY:	1-Ton or Smaller Pickup Trucks	MOTOR:	Electric, 12V, 1/3 hp
MATERIAL COMPATIBILITY:	Bagged Rock Salt	AUGER (DIAMETER X LENGTH):	6.35 cm x 14.61 cm Vertical High-Flow Auger
CAPACITY (VOLUME):	0.09 cu m	SPINNER SIZE:	25.4 cm Nylon/Glass Reinforced Resin
SPREAD WIDTH:	Up to 7.6 m	AVAILABLE MOUNTS:	2.54 cm Receiver (std)
APPROXIMATE WEIGHT (EMPTY):	30.8 kg	OPTIONAL MOUNTS:	Drop Utility, Trailer Utility, 3-Point Mounts

LOW PROFILE 500

POLY TAILGATE SPREADER

HOPPER CONSTRUCTION:	Polyethylene	APPROXIMATE WEIGHT (EMPTY):	34.0 kg with mount
VEHICLE COMPATIBILITY:	Vehicles with Class III Hitch	OVERALL DIMENSIONS (LxWxH):	53.3 cm x 99.1 cm x 86.4 cm
MATERIAL COMPATIBILITY:	Bagged Ice Melters, Bagged Rock Salt, Calcium Flakes*, & Calcium Chloride Pellets*	MOTOR:	Electric, 12V, 1/3 hp
CAPACITY (VOLUME):	0.14 cu m	AUGER (DIAMETER X LENGTH):	6.68 cm x 15.24 cm
SPREAD WIDTH:	Up to 9.14 m	SPINNER SIZE:	25.4 cm Nylon/Glass Reinforced Resin
		AVAILABLE MOUNTS:	Class III Receiver Hitch (std)

LOW PROFILE 1000

POLY TAILGATE SPREADER

HOPPER CONSTRUCTION:	Polyethylene	APPROXIMATE WEIGHT (EMPTY):	47 kg without mount
VEHICLE COMPATIBILITY:	Full Size Trucks (Over 6,000 lb GVWR)	OVERALL DIMENSIONS (LxWxH):	49.5 cm x 128.3 cm x 88.9 cm
MATERIAL COMPATIBILITY:	Bagged Ice Melters, Bagged Rock Salt, Calcium Flakes*, & Calcium Chloride Pellets*	MOTOR:	Electric, 12V, 1/3 hp
CAPACITY (VOLUME):	0.23 cu m	AUGER (DIAMETER X LENGTH):	6.68 cm x 15.24 cm
SPREAD WIDTH:	Up to 9.14 m	SPINNER SIZE:	25.4 cm Nylon/Glass Reinforced Resin
		OPTIONAL MOUNTS:	Fixed Mount, Class IV Hitch Mount, Dual-Swing

LOW PROFILE 2500

POLY TAILGATE SPREADER

HOPPER CONSTRUCTION:	Polyethylene	APPROXIMATE WEIGHT (EMPTY):	59.4 kg without mount
VEHICLE COMPATIBILITY:	Full Size Trucks (Over 6,000 lb GVWR)	OVERALL DIMENSIONS (LxWxH):	63.5 cm x 127 cm x 106.7 cm
MATERIAL COMPATIBILITY:	Bagged Ice Melters, Bagged Rock Salt, Calcium Flakes*, & Calcium Chloride Pellets*	MOTOR:	Electric, 12V, 1/3 hp
CAPACITY (VOLUME):	0.24 cu m	AUGER (DIAMETER X LENGTH):	6.68 cm x 22.86 cm
SPREAD WIDTH:	9.14 m	SPINNER SIZE:	38.1 cm Nylon/Glass Reinforced Resin
		OPTIONAL MOUNTS:	Class IV Receiver Hitch Mount (std)

SPEED-CASTER™ 525

POLY TAILGATE SPREADER

HOPPER CONSTRUCTION:	Polyethylene	OVERALL DIMENSIONS (LxWxH):	52.1 cm x 96.5 cm x 86.4 cm
VEHICLE COMPATIBILITY:	1-Ton or Smaller Pickup Trucks	MOTOR:	Dual Electric, 12V, 1/3 hp
MATERIAL COMPATIBILITY:	Bagged Rock Salt & Bulk Rock Salt	AUGER (DIAMETER X LENGTH):	7.62 cm x 35.56 cm Heavy-Duty Solid Steel
CAPACITY (VOLUME):	0.15 cu m	SPINNER SIZE:	25.4 cm Nylon/Glass Reinforced Resin
SPREAD WIDTH:	9.14 m	AVAILABLE MOUNTS:	2.54 cm Receiver (std)
APPROXIMATE WEIGHT (EMPTY):	72.6 kg	OPTIONAL MOUNTS:	Drop Utility, Trailer Utility, 3-Point Mounts

SPEED-CASTER 900

POLY TAILGATE SPREADER

HOPPER CONSTRUCTION:	Polyethylene	OVERALL DIMENSIONS (LxWxH):	61.0 cm x 132.1 cm x 91.4 cm
VEHICLE COMPATIBILITY:	1-Ton or Smaller Pickup Trucks	MOTOR:	Dual Electric, 12V, 1/3 hp
MATERIAL COMPATIBILITY:	Bagged Rock Salt & Bulk Rock Salt	AUGER (DIAMETER X LENGTH):	7.62 cm x 50.8 cm Heavy-Duty Solid Steel
CAPACITY (VOLUME):	0.25 cu m	SPINNER SIZE:	30.5 cm Nylon/Glass Reinforced Resin
SPREAD WIDTH:	12.2 m	OPTIONAL MOUNTS:	Pivot Mount, 2.54 cm Receiver Hitch
APPROXIMATE WEIGHT (EMPTY):	81.7 kg		(Requires Adapter Mount), 3-Point Hitch Mount



SIDEWALK SPREADERS

SIDEWALK + STORAGE PRODUCTS

Fisher Engineering's sidewalk and storage products facilitate effective snow and ice management in urban settings. This collection includes drop and broadcast spreaders and a liquid sprayer for sidewalk treatment.



WB-100B BROADCAST SPREADER

The WB-100B poly broadcast spreader is built for treating wider pedestrian areas such as driveways, courtyards, and wide walkways.

CAPACITY:	0.5 cu ft (0.04 cu m) 100 lb (45.36 kg)
SPREAD WIDTH:	Up to 20' (6.0 m)
MATERIAL TYPES:	Bagged Ice Melters, Bagged Rock Salt Bulk Salt, Calcium Flakes, Calcium Chloride Pellets



WB-160D DROP-STYLE SPREADER

The WB-160D poly drop-style spreader is made for treating walkways and keeping material out of adjoining landscape features.

CAPACITY:	1.5 cu ft (0.04 cu m) 160 lb (75.57 kg)
SPREAD WIDTH:	36' (11.0 m)
MATERIAL TYPES:	Bagged Ice Melters, Bagged Rock Salt Bulk Salt, Calcium Flakes, Calcium Chloride Pellets



SS-120 SIDEWALK SPRAYER

The SS-120 walk-behind sprayer gives you battery-powered convenience and a heavy-duty spray wand for stairs and other places where granular deicers are ineffective, such as curbs and steps. Pretreating with liquid brine allows you to use less salt, save time, and deliver exceptional results.

CAPACITY:	12 gallons (45.4 L)
SPRAY WIDTH:	Up to 48" (122 cm)
MATERIAL TYPES:	Brine, Calcium Chloride Solution, Premium Solutions

ALL-WEATHER STORAGE CONTAINERS

Streamline your operations by storing salt, tools, PPE, and supplies where you need them with FISHER storage containers. These weatherproof polyethylene units are available in four sizes—3, 6, 12, and 18 cubic feet—to suit any storage requirement.






BORN IN THE USA.

SNOW + ICE IN OUR DNA

In 1948, a man named Dean Fisher started a snowplow company. The name was simple: His. And the destination was busy: Boston. So after a trip to see the in-laws in Maine, the plan changed.

frozen into culture as the leader of snow and ice removal. Our success grew us out of the garage, but we've always kept that day-one spirit. Still building, testing, and proving right here in Rockland.

Fisher chose a small coastal town called Rockland. In his words: "What better place to build snowplows than in snow country?" He began in a small garage by the water, and designed over 50 snowplows that first winter. Parts were chained to the pier—testing corrosion in the cold, salty ocean. That set the relentless bar for every winter to come. Over 75 years later, snowplows from Fisher Engineering are

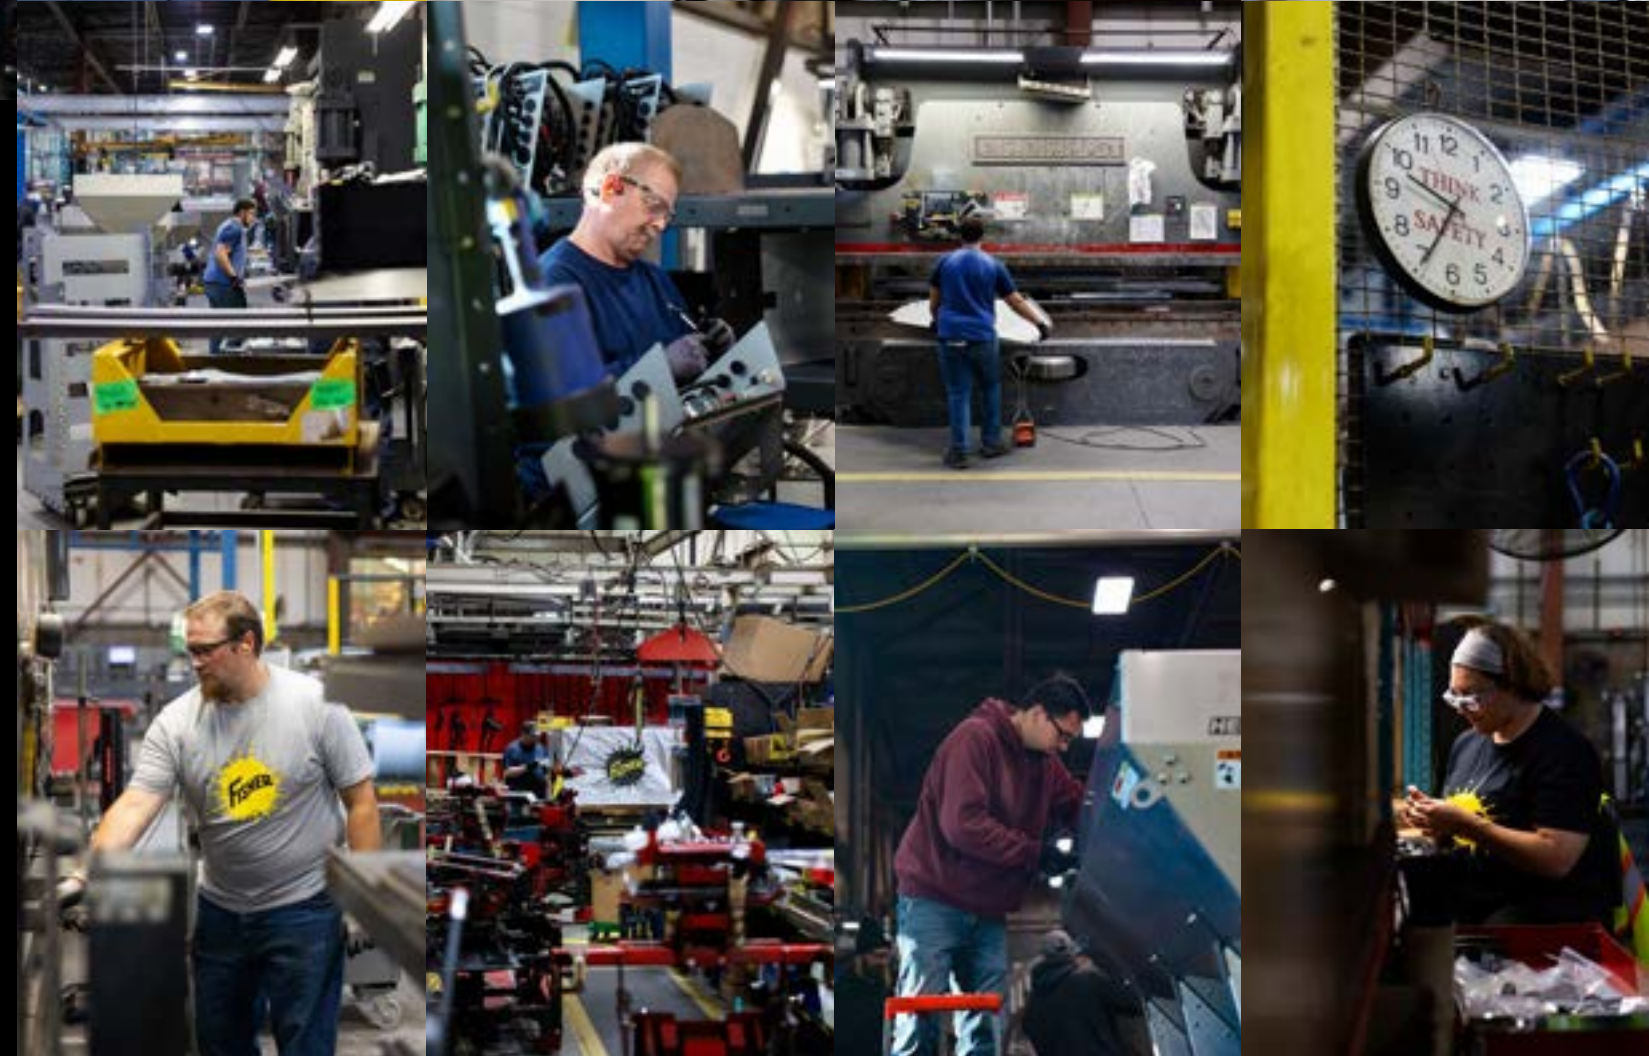

“THE BEST PRODUCT WE KNOW HOW TO MAKE. THE BEST SERVICE WE KNOW HOW TO GIVE.”

-Dean Fisher

FISHER STORIES:

INSIDE THIS 7TH GENERATION MAINER'S LIFE, LOSS, & LEGACY.

Dave Wiley is the Technical Service Manager at Fisher Engineering and has been with the brand since 2009. But his roots in Maine go far deeper. He's the 7th generation to live on his family's property in Warren, and holds a special perspective on life, loss, and what it means to build a legacy. In this debut episode of FISHER Stories, we join Dave and his restored 1953 Jeep Willy to uncover the person behind the plow.

Scan to watch



FISHER ENGINEERING | 50 Gordon Drive | Rockland, Maine 04841

Fisher Engineering reserves the right under its product improvement policy to change construction or design details and furnish equipment when so altered without reference to illustrations or specifications used. Fisher Engineering or the vehicle manufacturer may require or recommend optional equipment for spreaders. Do not exceed vehicle ratings with a spreader. This product is manufactured under the following US patents: 7,347,390; 7,540,436; 9,033,265; 9,296,571; 9,757,744; 11,680,379; and other patents pending. Fisher Engineering offers a limited warranty for all spreaders. See separately printed page for this important information. The following are registered (®) or unregistered (™) trademarks of Douglas Dynamics, LLC: FISHER®, HELIXX™, QUICK-CASTER™, SPEED-CASTER™, TEMPEST™



FISHERPLOW.COM

© 2025 Douglas Dynamics, LLC
All rights reserved.



SEE YOU IN THE STORM